

## LED Flood Light with Polycarbonate Lens – 200W

Model: RL-FL200W-PCT


LED flood lights are suitable for both outdoor and indoor commercial application such as parking areas, billboards and common areas.

### Product Features

- Quality Driver
- Aluminium die cast housing
- Polycarbonate face
- Full range power input 90-305VAC
- 366 x 484 x 74 mm
- 90° Beam Angle
- IP66 , IK10 housing



Vandal Resistance  
**IK10**

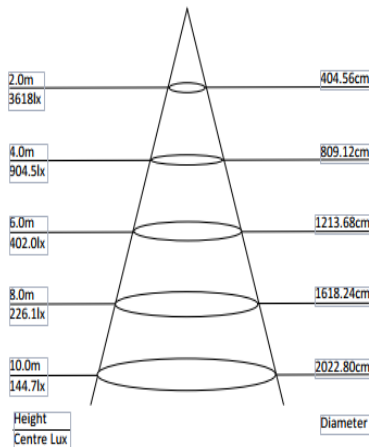

SPECIFICATION	
Colour	(4000K)
Lumen (lm)	26,636Lm
Efficiency (Lm/w)	>139lm/w
Light Source	LED
CRI (%)	>80%
Beam Angle	90°
Power Requirement	AC 90~305 V
Power Consumption	200W
Housing	Die Cast Aluminium with Polycarbonate Lens
Lifespan	> 50,000 hours
Operation Temperature	-20°C~+60°C
Dimension (mm)	366 × 487 x 74 mm
Weight	6.5 kg
Protection Rating	IP66
Warranty	5 years