Refresh Lighting & Energy Solutions

LED Canopy Light – 150W

Model: RL-C150WS


Surface mount LED canopy lights are suitable for both outdoor and indoor commercial applications such as loading docks, petrol stations, freezers, cool rooms, food processing plants and common areas.

Product Features

- Only consumes 150w of power
- Aluminium die cast housing
- Opal polycarbonate face
- Long operating life and performance
- 120° Beam Angle
- IP65 Waterproof housing
- Easy connect junction box on rear





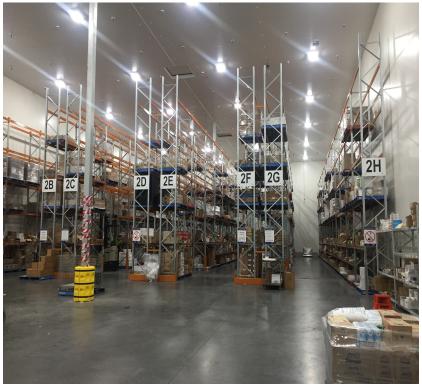

SPECIFICATION	
Colour	Cool White (6000K)
Lumen (Im)	13,350lm
LED Efficiency (Lm/w)	>89lm/w
Light Source	Philips 3030 LED's
CRI (%)	>80%
Beam Angle	120°
Power Requirement	AC 100~240V
Power Consumption	150W
Housing	Die Cast Aluminium and Opal PC Lens
Lifespan	> 40,000 hours
Operation Temperature	-20°C~+45°C
Dimension (mm)	455 (L) × 455 (W) x 110 (D)
Weight	6.1kg
Protection Rating	IP65
Warranty	5 years

Refresh Lighting & Energy Solutions PTY LTD. 1/13 Commerce Circuit, Yatala QLD 4207 Phone – 1300 911 866 Website – www.refreshlighting.com.au Email – info@refreshlighting.com.au

